

COMPONENT LIST FOR

OPTION CONNECTOR
ASSEMBLY KIT
オプションコネクタ組立キット
249J153058

ITEM No.	DESCRIPTION		QUANTITY			REMARKS
			IN USE	SPARE	TOTAL	
1	OPTION CONNECTOR ASSEMBLY GUIDE オプションコネクタ組立要領図	24W153062			1	24W153062
2	SHELL シェル	10336-52F0-008			1	
3	CONNECTOR コネクタ	10136-3000VE			1	
4	BOOT ブーツ	24E152708			1	
5	TUBE チューブ	PT 2 X - WHITE シロ			20cm	

原紙

入
96.9.27
庫

APPROVED BY

96.9.25
比田

CHECKED BY

15 Sep 96
H. Jida

DRAWN BY

96.9.25
7/1, Clay

MFRS. NAME

ANRITSU CORP.

LIST No.

24W153063-00

24W153062


APPLICATION

REVISIONS


CABLE ; TO BE COLLECTIVELY SHIELDED BY A BRAID

CABLE DIA. ; MAX 14mm

WIRES; AWG #22 TO #28₂
(SQUARE 0.08 TO 0.33mm)

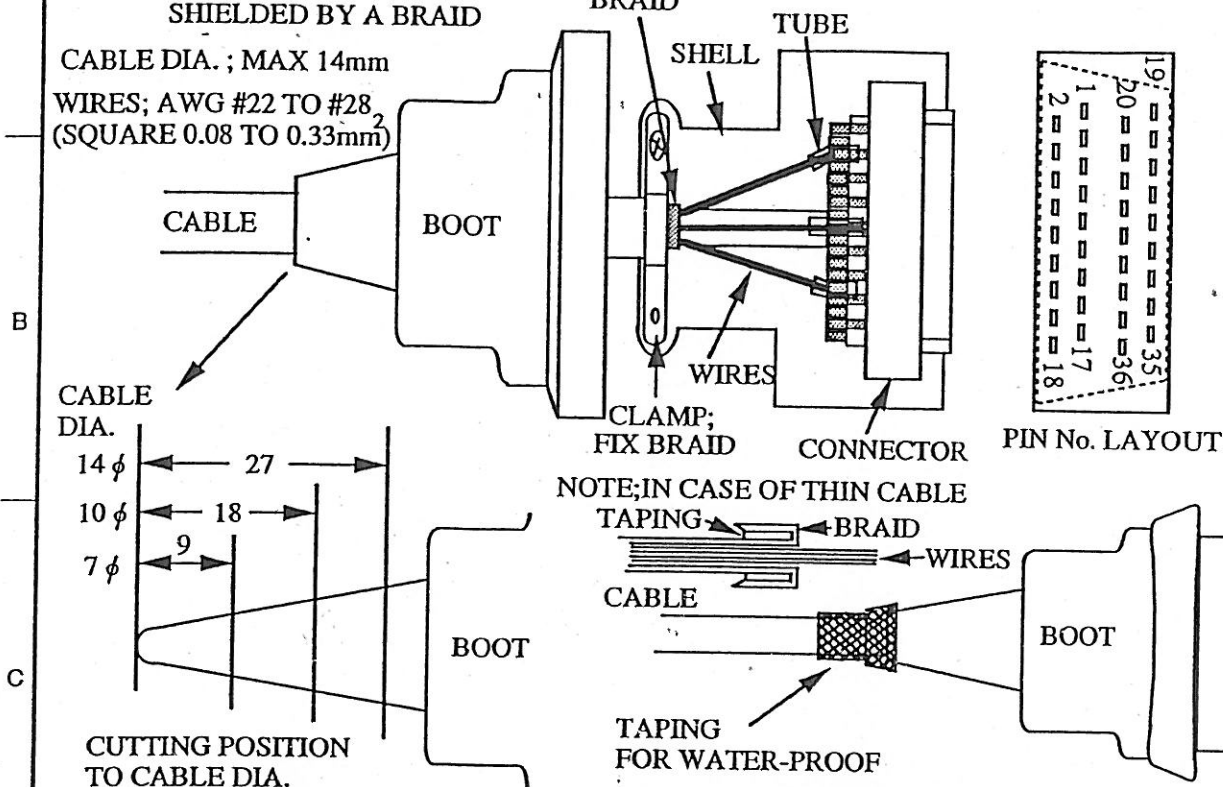


CABLE DIA.



CUTTING POSITION TO CABLE DIA.
(FOR REFERENCE)

NOTE; IN CASE OF THIN CABLE

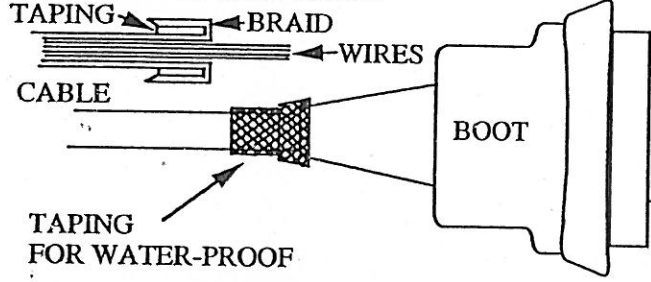

IN CASE OF INSTALLATION TO DISPLAY, TURN OVER THE EDGE OF THE BOOT.

CONNECTOR PIN AND FUNCTION TABLE

FUNCTION	PIN No.	FUNCTION	PIN No.	FUNCTION	PIN No.
NMEA2-A(+)	1	TRIGGER IN	5	GYRO CLOCK(+)	26
NMEA2-B(-)	19	TRIGGER OUT	*23		
GND	2	SHF IN	6	COS(SIN/COS) or GYRO DATA(+)	27
EXTERNAL BUZZER(+)	*20	SHF OUT	*24	REF(SIN/COS) or GYRO CLOCK(-)	10
EXTERNAL BUZZER(-)	*3	AZIMUTH IN	7	GND	28
VIDEO IN	21	AZIMUTH OUT	*25		
VIDEO OUT	*4	GND	8		
GND	22				


Note; 1) The other pins not shown in the table are reserved for future.

2) No mark in PIN No. column are for INPUT, *mark are for OUTPUT.

3) [---] mark is necessary to modify Disp.PCB. See service manual.

QTY	ITEM	PART NO.	DESCRIPTION	MATERIAL	FINISH	NOTE

CHECKED BY <i>25 Sep '96 A. Oida</i>	TRACED BY	SCALE
APPROVED BY <i>25 Sep '96 T. Hidai</i>	DRAWN BY <i>196.9.25 Y. Aoy</i>	



TITLE OPTION CONNECTOR ASSEMBLY GUIDE	DRAWING NO. 24 W153062 - 00
---	---------------------------------------

